



The technical specifications might not be congruent.

- NVMZ series
- NENUTEC zone valves are especially designed and produced for applications in the HVAC systems.
- Our wide range of NENUTEC zone valves have been developed to regulate the flow of water and steam demanded by a controller.

Product Features

Zone valve:

- Zone valve size DN 15 (1/2") to DN 25 (1")
- 2-way (open/closed) and 3-way (mixing/diverting)
- The demand of high-rise buildings with high-pressure pumping systems is assured.

Fan Coil Actuator:

- Power Supply AC/DC 24 V and AC 230 V
- Control 2 / 3 Point
- Customer version on request


Model Selection Table 2-way

| DN | KVS | Running Time | Power Supply | Auxiliary Switch | Model / Type |
|-----------|-----|----------------------------|------------------|------------------|--------------|
| 15 (1/2") | 1.6 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 2015-1B |
| 15 (1/2") | 1.6 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 2015-2B |
| 20 (3/4") | 3.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 2020-1B |
| 20 (3/4") | 3.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 2020-2B |
| 25 (1") | 5.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 2025-1B |
| 25 (1") | 5.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 2025-2B |

Model Selection Table 3-way

| DN | KVS | Running Time | Power Supply | Auxiliary Switch | Model / Type |
|-----------|-----|----------------------------|------------------|------------------|--------------|
| 15 (1/2") | 1.6 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 3015-1B |
| 15 (1/2") | 1.6 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 3015-2B |
| 20 (3/4") | 3.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 3020-1B |
| 20 (3/4") | 3.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 3020-2B |
| 25 (1") | 5.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 3025-1B |
| 25 (1") | 5.5 | Ⓜ 9...10 sec / Ⓞ 4...5 sec | AC/DC 24 V ± 10% | No | NVMZ 3025-2B |

Dimensions (mm)

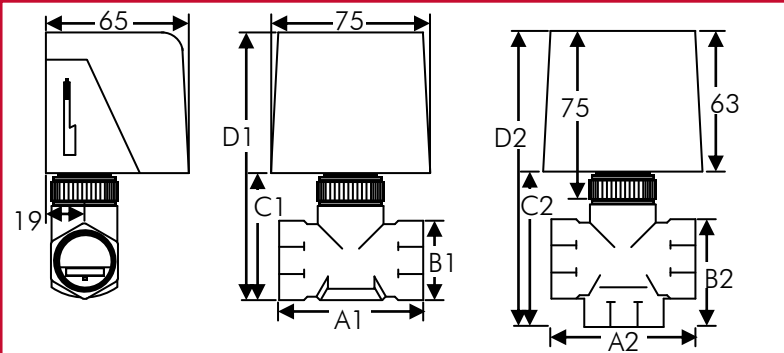

Dimensions of Valve Body (mm)

| Dimensions (~mm) | DN (mm) | A1 | B1 | C1 | D1 | Weight (kg) |
|------------------|---------|----|----|----|-----|-------------|
| 2-way | 15 | 52 | 29 | 54 | 115 | 0.263 |
| | 20 | 64 | 35 | 60 | 125 | 0.414 |
| | 25 | 71 | 42 | 67 | 130 | 0.609 |
| Dimensions (~mm) | DN (mm) | A2 | B2 | C2 | D2 | Weight (kg) |
| 3-way | 15 | 55 | 31 | 68 | 131 | 0.300 |
| | 20 | 66 | 54 | 74 | 138 | 0.469 |
| | 25 | 77 | 77 | 80 | 145 | 0.691 |

Technical Specifications

Zone Valve:

| | | |
|--|---|--------------------------|
| Service | Hot or cold water for HVAC | |
| Fluid Temperature limits | Water: +2°C...+105°C | |
| Ambient Operating Temperature | +2°C...+60°C | |
| Valve Body Pressure / Temperature Rating | Water: 232 psig (1.6 mPa) (PN16) | |
| Maximum Pressure Resistance | Water: 300 psi | |
| Normal stroke | 3 mm | |
| Flow Characteristic (3-way) | Equal Percentage flow characteristic of A (Coil) and linear flow characteristic of B (Bypass) | |
| Leakage | 0.01% of KVS (maximum flow) / 1% of KVS (maximum flow) for 3-way Bypass Port | |
| Pipe Connection | BSP (European Standard) / NPT on request | |
| Thread Connection | Female Thread | |
| Body Sizes | DN 15(1/2") to DN 50(1") | |
| Configuration | Normally closed (NC) (standard). Normally open (NO) on request. | |
| Materials | Body | Forged Brass |
| | Plug | Synthetic rubber EPT |
| | Packing Ring | O-ring EPT |
| | Stem | AISI 303 stainless steel |
| | Spring | AISI 302 stainless |

Actuator:

| | |
|-----------------------------|-----------------------------|
| Torque | 105 N ± 10 % (24 Lb ± 10 %) |
| Stroke Range | 3 mm...5 mm |
| Power Supply | AC/DC 24V or AC 230V |
| Frequency | 50 - 60 Hz |
| Control Signal | 2 Point |
| Motor | Synchronous stall motor |
| Power Consumption | |
| - Operating | 7.0 W |
| - End stop | 5.0 W |
| Fore Wire Sizing | 7.0 VA |
| Protection Class | III |
| Weight | 0.496 kg |
| Life Cycle | 100'000 |
| Sound level | 35 dB (A) |
| IP Protection | IP 40 |
| Operating Temperature | +2°C...+60°C |
| Non - operating Temperature | -20°C...+65°C |

Selection Formula

Legend

— Δp_{max} = Maximum permitted pressure difference for a long-life cycle referred to the full cycle of opening.
 - · - Δp_{max} = For low-noise operation.
 Δp_{v100} = Pressure difference of ball valve when fully open
 V_{100} = Nominal flow rate with Δp_{v100}

Formula k_{vs} for water



$$k_{vs} = \frac{V_{100}}{\sqrt{\frac{\Delta p_{v100}}{100}}}$$

k_{vs} [m³/h]
 V_{100} [m³/h]
 Δp_{v100} [kPa]


Definition of Δp_s

Closing pressure at which the actuator can still seal the valve tightly allowing for the appropriate leakage rate.

Flow Charts

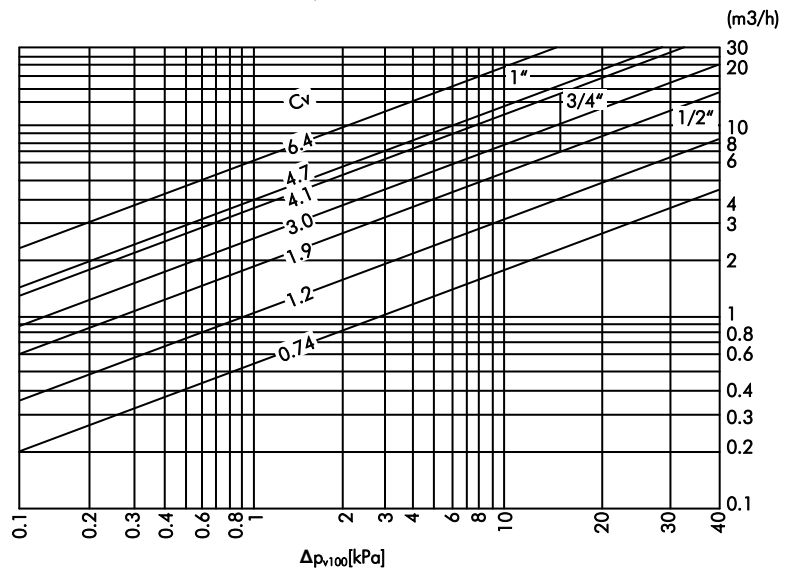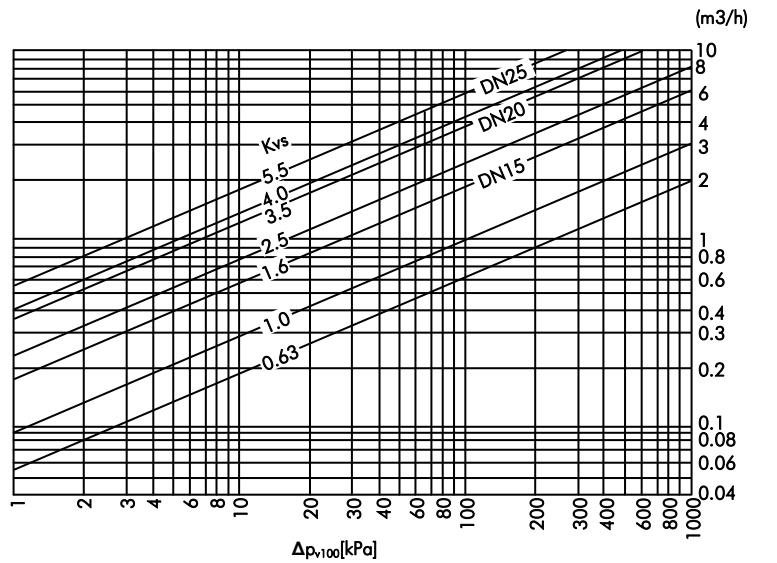

Wiring Diagram NVMZ Power Supply AC/DC 24 V - AC 230 V





⊥ ~ AC 24 V ±10%
 - + DC 24 V ±10%
 N L1 AC 230 V ±10%

2 Point


⚠ Connect via safety isolating transformer

Pipe Connections

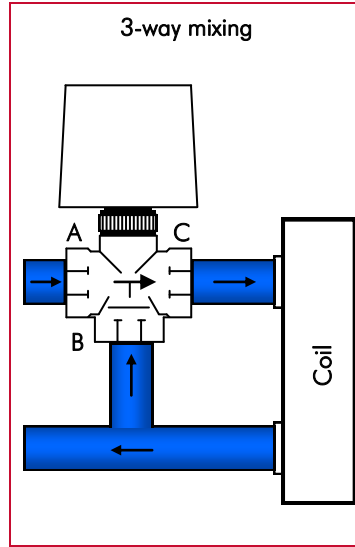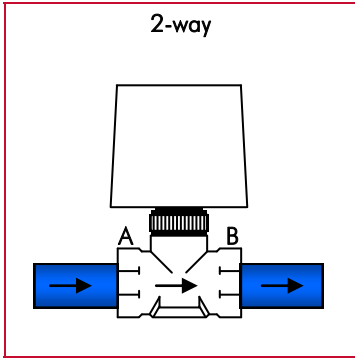


Mixing Applications:
Fluid enters through two inlets (A and B) and exits through one outlet (C).

Piping Application

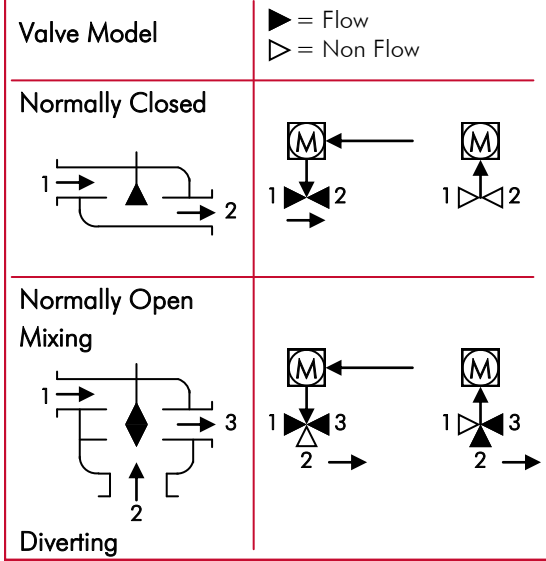

Application

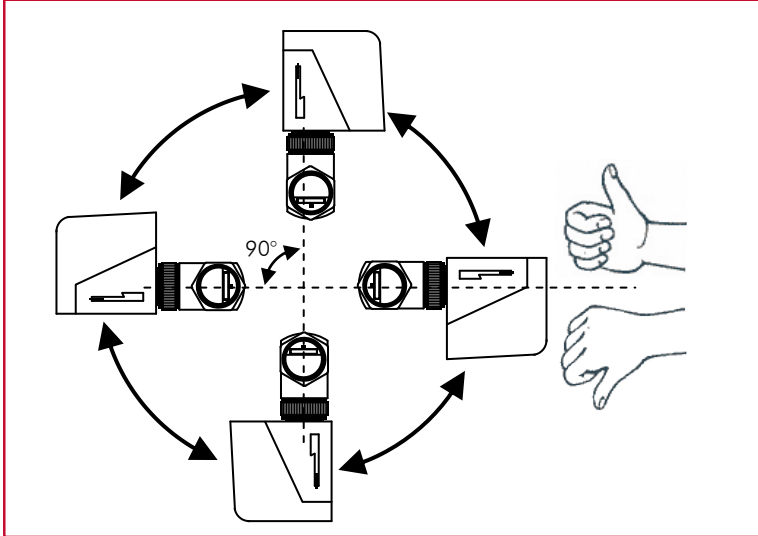

This actuator includes electrical and electronic components and may not be disposed as household garbage. Please consider the local valid legislation.



AC / DC 24 V: Connect via safety isolating transformer.

AC 230 V: To isolate from the main power supply, the system must incorporate a device which disconnects the phase conductor (with at least a 3 mm contact gap).



TELIMA AG

Research and Development
Schachenstrasse 80
CH - 8645 Jona/SG - Switzerland
T: +41 55 224 40 60
F: +41 55 224 40 69
E-Mail: info@telima.ch
Internet: www.nenutec.com